




ROOFING FELT

PREMIUM ROOF UNDERLAYMENTS

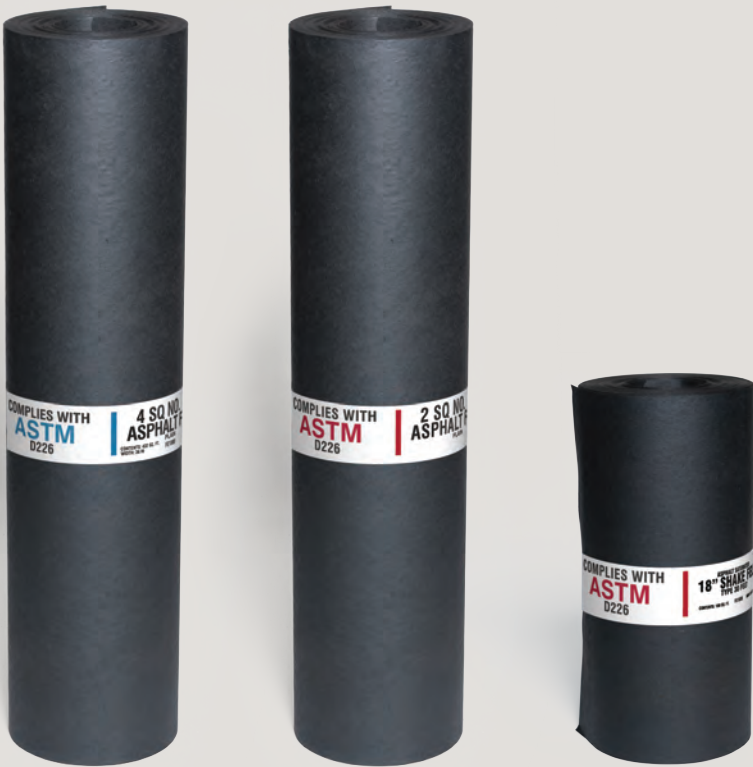

We offer a full range of ASTM D226 and ASTM D4869 rated felts.

OVER 45 YEARS OF

HAL FELT

PROVEN HISTORY OF HOME PROTECTION

HAL Felt has been the choice underlayment for home protection since 1974, with decades of proven performance in the field. With the home owner in mind, we exceed all applicable industry standards.

BREATHABILITY

HAL Felt is designed and manufactured to allow the transmission of moisture vapor, allowing the roof deck to breathe, while keeping bulk water from shingle leaks out. This helps prevent the rotting of wood decks, which can be caused by non-permeable synthetic products, and helps roofing materials last longer.

WALKABILITY

HAL Felt is manufactured to have the best walking surface of any roofing felt on the market.

MADE WITH THE ENVIRONMENT IN MIND

HAL Felt is made in the Pacific Northwest from locally sourced materials that have both pre-consumer and post-consumer wood and paper recycled material, garnering LEED (Leadership in Energy and Environmental Design) points where applicable.

INSTALLATION

HAL Felt is pre-conditioned to lay flat and remain stable during and after installation. Our heavy weight reinforcements greatly increase tensile strength and prevent tearing during installation.

USES

HAL Felt is used beneath shingles, shakes or tiles as a secondary protective layer between the roof deck and the finished roofing. This secondary layer protects against wind-blown moisture which may occasionally penetrate past the outer roofing material.



#15 FELT

NO. 15 4 SQ ASTM D226

PRODUCT NUMBER: FE1000

STANDARD COMPLIANCE: ASTM D226

DIMENSIONS: W: 3' L: 144' SQFT: 432

COUNT PER PALLET: 25

ROLL WEIGHT: 53 LBS

PALLET WEIGHT: 1375 LBS

ALSO AVAILABLE IN: D4869



#30 FELT

NO. 30 2 SQ ASTM D226

PRODUCT NUMBER: FE1400

STANDARD COMPLIANCE: ASTM D226

DIMENSIONS: W: 3' L: 72' SQFT: 216

COUNT PER PALLET: 25

ROLL WEIGHT: 60 LBS

PALLET WEIGHT: 1550 LBS

ALSO AVAILABLE IN: D4869



SHAKE FELT

NO. 30 18" SHAKE ASTM D226

PRODUCT NUMBER: FE1600

STANDARD COMPLIANCE: ASTM D226

DIMENSIONS: W: 18" L: 120' SQFT: 180

COUNT PER PALLET: 32

ROLL WEIGHT: 50 LBS

PALLET WEIGHT: 1650 LBS

ALSO AVAILABLE IN: 22" & BOTH WIDTHS IN ASTM D4869

OUR FULL FELT LINE UP IS ON THE BACK

HEAD OFFICE
9681 - 187 Street
Surrey BC, Canada.
V4N 3N3

EMAIL
contact@halind.com

PHONE
local - 604 888 0777
toll free - 1 800 663 0076

FAX
604 888 1656

ONLINE
www.halind.com



BUT WAIT, THERE'S MORE!

FE1000	#15 4 Sq. ASTM D226
FE0700	#15 3 Sq. ASTM D226
FE1400	#30 2 Sq. ASTM D226
FE1600	#30 SHAKE ASTM D226
FE1675	#30 22" Shake ASTM D226
FE2025	P40 4 Sq. ASTM D4869 Type I
FE1925	P30 3 Sq. ASTM D4869 Type I
FE1725	P20 2 Sq. ASTM D4869 Type II
FE2000	4 Sq. Underlayment ASTM D4869 Type II
FE1750	2 Sq. Underlayment ASTM D4869 Type II
FE1300	#30 2 Sq. ASTM D4869 Type III
FE1500	#30 Shake ASTM D4869 Type III
FE1825	P10 Shake - non-rated
FE1850	Standard Shake - non-rated

MADE IN THE PACIFIC NORTHWEST

Established in 1974, HAL Industries Inc. is a leader in the manufacture and development of protective construction membranes. The company operates 2 manufacturing facilities located within the greater Vancouver area of British Columbia, Canada. A progressive quality control program ensures that all its products meet and exceed appropriate industry standards and specifications.

HAL Industries Inc. strives to anticipate the future needs of its customers, and works to provide solutions to challenges faced in the construction industry.